


Austral CrocPly

Tough, waterproof and slip resistant floor panel.

Austral CrocPly is designed for the most demanding floor applications. CrocPly is made using Araucaria (hoop pine) plywood overlaid with a hard wearing, waterproof and slip resistant film. CrocPly's plywood core is certified to Australian standards including Structural AS/NZS2269 and Marine AS/NZS2272.





AUSTRALIAN MADE 
DURABLE 220G FILM 

TESTED  TOUGH

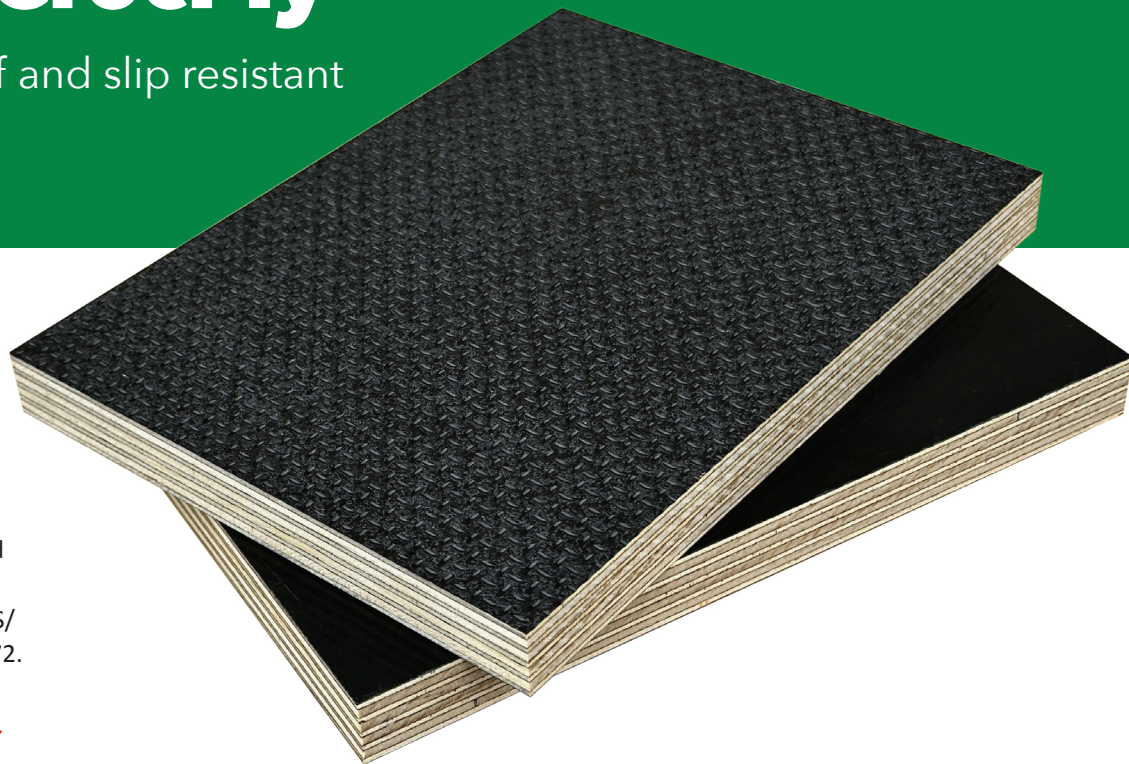

Applications

- Truck & trailer decking
- Vehicle floors (utes, vans, lorries)
- Scaffolding
- Pedestrian platforms
- Stair treads
- Ship decking
- Stage platforms

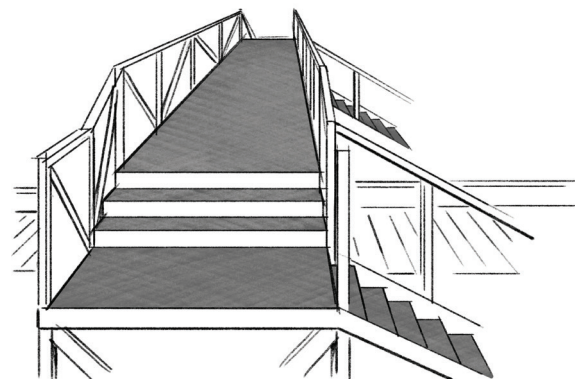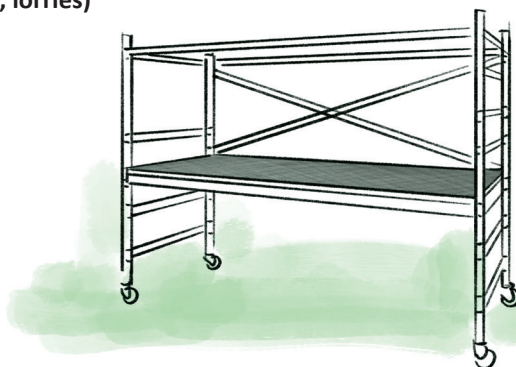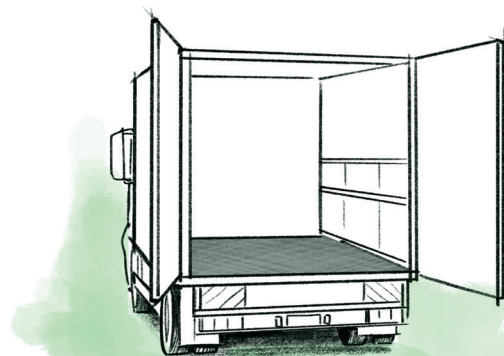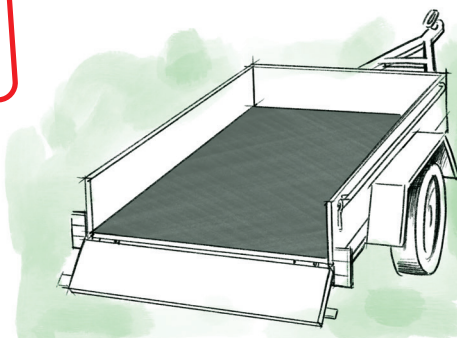

Advantages

- Excellent strength to weight ratio
- Highly durable and slip resistant surface with 220g film
- Easy to machine using standard woodworking tools
- Resistant to most commonly used chemicals
- Australian made using Araucaria (hoop pine) plywood



AUSTRALIAN GROWN • AUSTRALIAN CERTIFIED • AUSTRALIAN MADE

Austral CrocPly is designed, constructed and tested to the toughest Australian standards to guarantee performance in the toughest applications.



TECHNICAL SPECIFICATIONS


Panel dimensions	2440mm x 1220mm; 2400mm x 1200mm
Thicknesses	13mm, 17mm, 19mm, 25mm
Plywood standard	AS/NZS2269 Structural AS/NZS2272 Marine
Timber specie	Araucaria (hoop pine) PEFC certified plantation grown
Finish	220g/m2 black colour phenol film. Wire mesh pattern face, smooth back. Smooth face and back is available on request. Panels supplied with sealed edges. Tongue and groove available. Edge sealer available for cut edges on site.
Density	600 kg/m3
Glue bond	A-Bond (water boil proof) 25 Yr bond warranty
Formaldehyde emission	E0 rating (AS/NZS 2098.11)



Boil testing



Abrasion test before

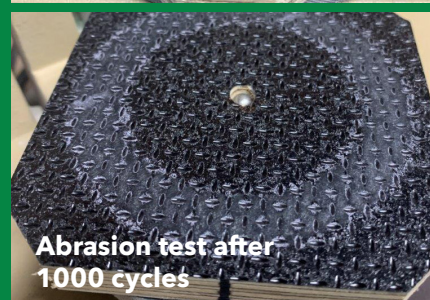

Abrasion test after
1000 cycles

WEAR RESISTANCE

Slip test (dry friction)	Class D1 (AS 4586-2013)
Slip test (wet pendulum)	Class P5 (AS 4586-2013)
Taber abrasion test	1000 cycles (AS 1580.403.2)

CROCPLY SPECIFICATIONS

NOMINAL THICKNESS (mm)	NUMBER OF PLIES (pcs)	THICKNESS TOLERANCE (mm)		WEIGHT kg/m2	STRENGTH F Rating
		min	max		
13	7	12.48	13.52	7.8	F27
17	9	16.32	17.68	10.2	F27
19	9	18.43	19.57	11.4	F22
25	13	24.25	25.75	15	F27

For more information visit australply.com.au or call (07) 3426 8666.



**AUSTRAL
PLYWOODS**



AUSTRALIAN GROWN • AUSTRALIAN CERTIFIED • AUSTRALIAN MADE